USER MANUAL

Smart Disc Repair

XDVDREPAIR

Dear Customer,
thanks for choosing Hamlet products. Please follow carefully the instructions for its use and maintenance and, once this item has run its life span, we kindly ask You to dispose of it in an environmentally friendly way, by putting it in the separate bins for electrical/electronic waste, or to bring it back to your retailer who will collect it for free.

Responsibility Statement
The European importer declares that this product is compliant with CE standards.
Importer references and contact details are available on www.hamletcom.com in the "About Us" section. In order to reduce paper consumption we have only printed a concise version of CE declaration of conformity and Quick installation Guide.
Full compliance declaration and product documentation will be available contacting us at info@hamletcom.com specifying product code and documentation required.

We inform You this product is manufactured with materials and components in compliance with RoHS directive 2002/95/CE; with WEEE Directive 2003/96/CE, Italian Legislative Decree 2005/151 and EMC Directive 89/336/EEC for the following standards:

EN 55022: 1998+A1: 2000+A2: 2003
EN 61000-3-2: 2000
EN 61000-3-3: 1995+A1: 2001
EN 55024: 1998+A1: 2001+A2: 2003

Instruction

Make sure the power adapter is securely plugged to the main body's power socket.

Step 1 • Buffing

1 Open the cover plate, place buffing pads (pink color) into the left and right side of the mounting shaft 2 Insert the disc, then press power button. The process will stop automatically after 2 to 3 minutes, open the cover plate and retrieve the disc to go to Step 2.

Step 2 • Repairing

1 Place the repair pads (yellow color) into the left and right side of the mounting shaft 2 Add 2 small drops of repair fluid (10cc bottle) on the right side, close the cover plate and press the power button 3 After the process stops automatically, retrieve the disc to finish the process 4 Always clean the buffing pad (pink color) with the included mini brush after use to maintain optimal performance 5 For deep scratch repair, repeat the procedure (Step 1&2) until best results achieved 6 If the results of disc repairing aren't satisfactory, repeat the procedure (Step 1&2) or replace the buffing and repair pads.

Step 3 • Cleaning

1 Open the cover plate, place cleaning pads (blue color) into the left and right side of the mounting shaft. Add 2 small drops of cleaning fluid (20cc bottle) on the right side, and then insert the disc. Then press power button 2 After the process stops automatically, retrieve the disc to finish the process 3 If still not satisfied with the result, repeat the procedure until best results achieved.

Note

- This unit can return damaged disc back to readable and writable condition, though it will not erase any physical scars or scratches present.
- During the repairing process, there maybe circular marks on the disc; this is perfectly normal condition and will not damage the disc.
- If the disc is faulty due to its original production, this unit will not repair it.
- If the disc is scratched into the inner foil layer, this unit will not repair it.
- Working cycle (Buffing and Repairing): About 4 minutes.
- The whole set of the pads and fluids can be used for 50 times.
- A complete set of repairing Liquid and Pads is available for purchase. Code XDVDREPKIT

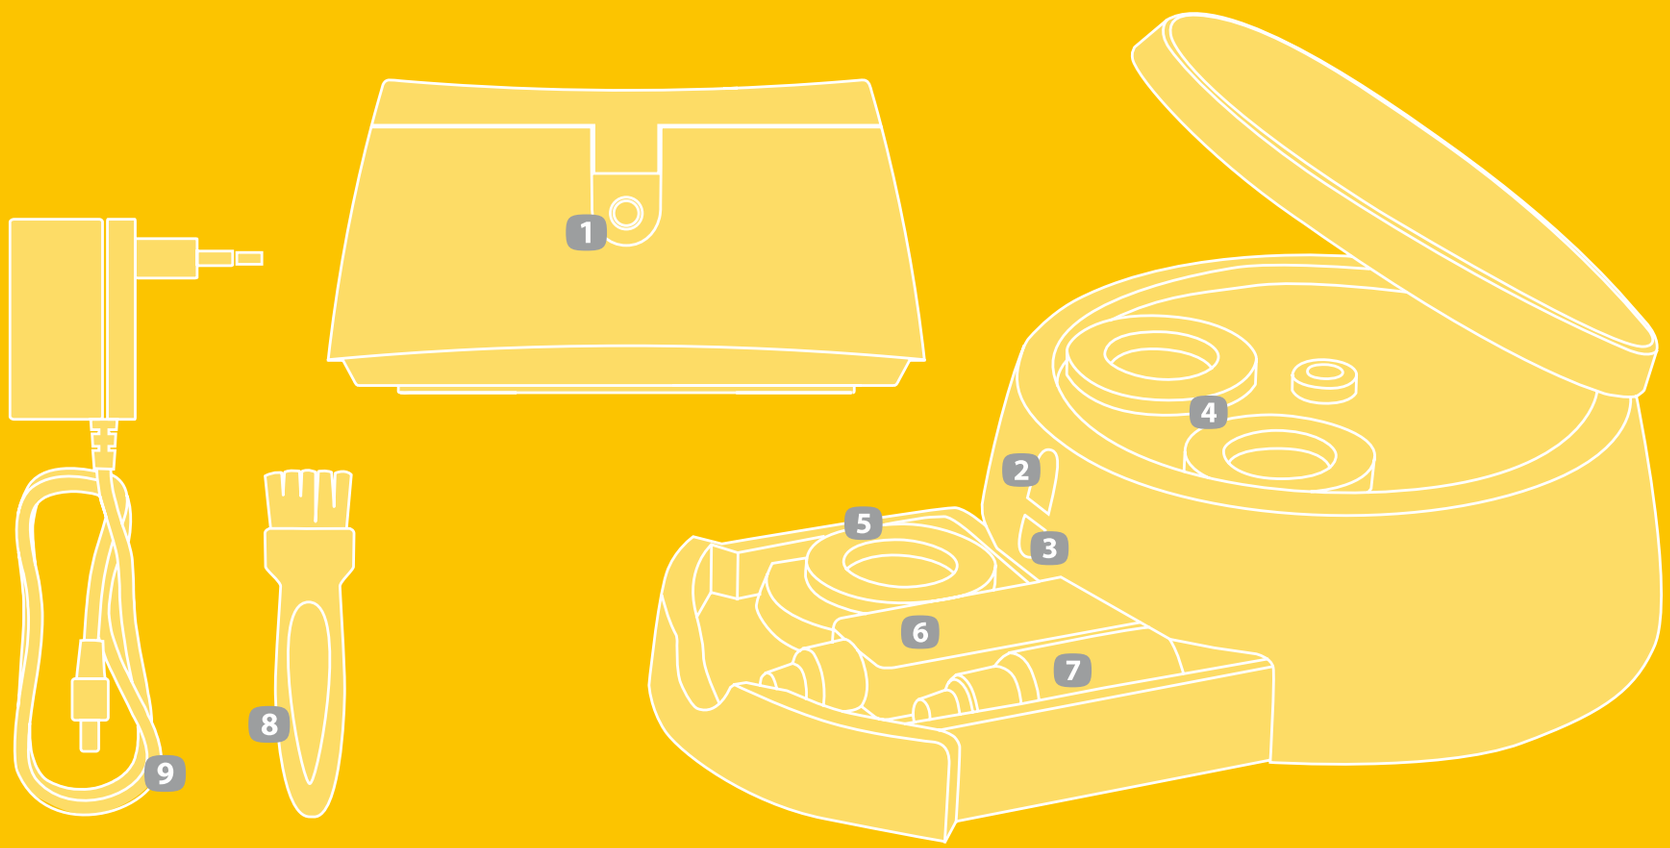

Product Information

1 Power socket 2 Open cover plate button 3 Power button 4 Buffing pads
5 Repairing pads and Cleaning pads 6 Cleaning Fluid 7 Repair fluid
8 Mini brush 9 Power adapter

General Information

Specifications

- Power Source: DC 12V 500mA
- Dimension:D160mm X H76mm
- Weight: 470g w/o Power Adapter

Accessories

- Buffing pads (One pair) (Pink)
- Repairing pads (One pair) (Yellow)
- Cleaning pads (One pair) (Blue)
- Cleaning fluid (20cc bottle)
- Repair fluid (10cc. bottle)
- Mini brush
- Power adapter

Caution

- Do not press the power button when no disc is placed inside the unit
- Refrain from operating the unit continuously for more than 30 minutes.
- Refrain from adding more than 2 drops of the repair fluid onto the repair pads.
- Color of fluid may change over time, but does not affect the repairing performance.
- Please shake bottle before use to ensure it for better solution is well mixed.